


## Speed Rivet BSR Countersunk Head

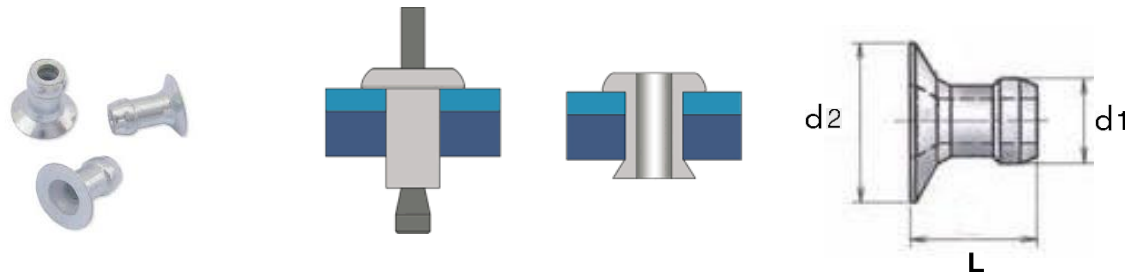

Speed Rivet BSR Countersunk Head						
d1	Available Lengths	Grip Range - E	Drill Size	d2 - Min	d2 - Max	
3.2	4.8	1.60	3.26	5.1	5.9	
	Up To 8.8	Up To 6.80	To 3.34			
4.0	5.2	1.6	3.97	6.1	6.9	
	Up To 9.2	Up To 6.90	To 4.04			

**Material : Aluminium**

Supplied In A Strip Paper (Loading System) And Placed Using A Repetition System With A Single Mandrel  
No Interruptions And Up To 60 Rivets Per Minute Can Be Inserted Offering A Fast And High Preceision Assembly  
Increasing Productivity

BSR Are Suitable For Applications Metal - Plastic & Aluminium Alloys  
Increases Productivity  
Expands Radially During Installation  
Good Resistance To Shear Strength

**INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY**